




Rear View



Inside View

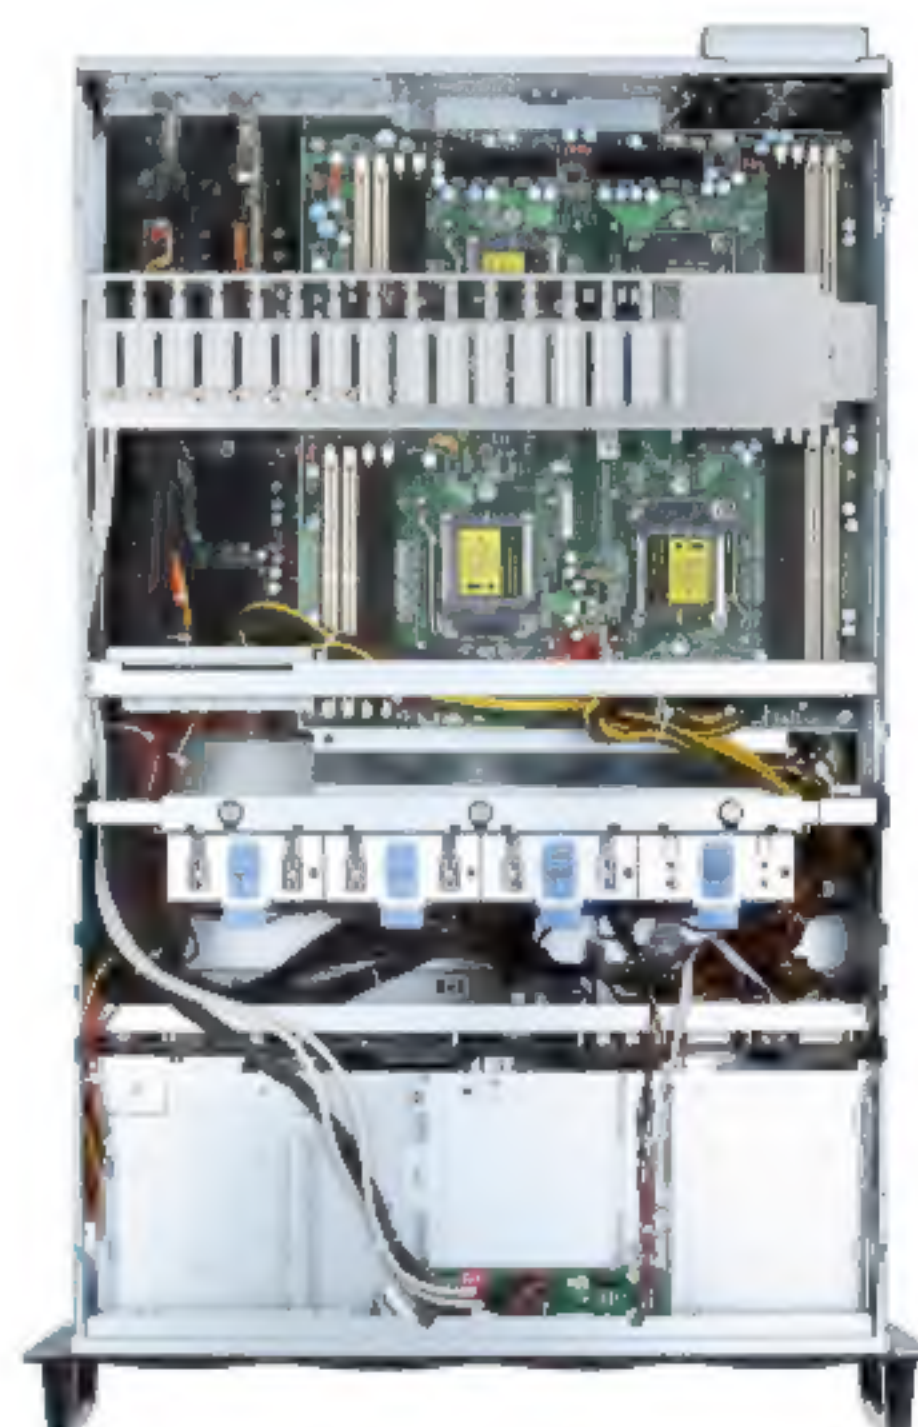

Front View



Features & Benefits

- Support 2/4/8-way CPU solution
- Fully utilized space to support 24 x 3.5" hot-swap HDDs
- Additional 3.5"/2.5" OS HDD with Chenbro storage kits for ODD & FDD space
- Removable M/B & PSU carriers for easy maintenance
- Easy-assembly fan bar with anti-vibration design
- Modular backplane design for well inventory management
- Tylersburg solution compliance

Specification

Model Name	• RM51424
M/B Form Factor	• 16.4" x 13" for Quad M/B, Extended ATX (16" x 13") for Quad CPU M/B, 16" x 14.3", 13.68" x 13", Extended ATX (12" x 13"), CEB (12" x 10.5"), ATX (12" x 9.6")
Dimension (D×W×H)	• 693 mm x 430 mm x 220 mm • 27.2" x 16.9" x 8.8"
Drive Bay	• External : 3.5" x 1 • Internal : 3.5" x 1 • Slim ODD : 1 • Slim FDD : 1 • Hot-Swap HDD Tray : 24
PSU	• Form Factor : 3+1 Redundant • Watt : 1350 W, 1620 W (For 8-way M/B solution)
Indicator	• 1 x Power Status LED, 1 x HDD Activity LED, 2 x LAN Activity LEDs, 1 x Fan Failure & Overheat Warning
Front Control	• Power ON/OFF, Alarm Mute, System Reset, 2 x USB 2.0 Ports
System Security	• Intrusion Switch
Cooling Fan	• Front : N/A • Middle : 8 x 80 mm (T=32 mm) hot-swap middle fans • Rear : Optional 2 x 80 mm (T=25 mm) rear fans
Slot Opening	• 7
Metal Thickness	• SGCC/1.2 mm
Net Weight	• 46.1 Kg (With PSU)
Gross Weight (w/Packing)	• 55.54 Kg (With PSU)
Backplane	• SATAII/SAS, Mini-SAS
Rear Window	• Standard
Front Bezel	• Optional
Cubic Feet	• 10.21
Container Info. (Single Packing with Paper Pallet)	• 20' : 90 • 40' : 190



Optional Mini-SAS backplane



Optional SATAII/SAS backplane




Fan bar with anti-vibration rubbers



Enforcing card holder



Optional 2 x rear 80 mm fans for 8-way solution

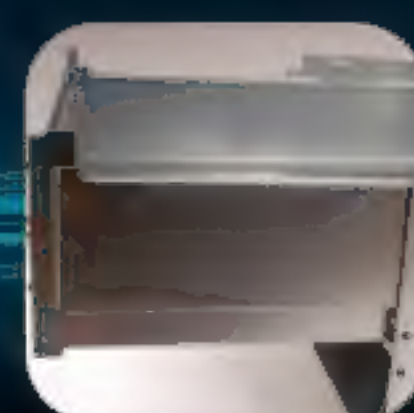

Removable M/B carrier